



WEATHERCOAT LONG LIFE 15



Product Attributes

Long Lasting Durability

Comes with 16 years performance warranty



Covers Cracks

Elastomeric film helps covers cracks upto 3.2 mm and prevents rain water ingress



Water repellence

Nano Silicon technology provides protection against extreme rain



Advanced Anti-algae & Anti-fungal protection

Prevents the growth of fungus and algae on exterior walls



Dirt pick up resistance

Unique polymer composition doesn't allow dust to settle on surface



High sheen

PU gives superior film strength & High sheen finish



Green Pro Certified

Validates our effort in striving towards cleaner, more sustainable future




Product Description

Engineered with amalgamation of nano technology and PU chemistry, Weathercoat Long Life 15 is an ultra-high performance exterior paint with special grade of elastomeric acrylic polymer and enriched with PU Silicon. The paint has superior mechanical properties - high elasticity, superior dust repellency and water repellency. It's a highly optimised formulation with light fast pigments and special additives that provides long-term protection even under challenging climatic conditions. The paint comes with 16 years of warranty.

Recommended Use

Exterior plastered surfaces, concrete blocks and asbestos

Colour Range



Over 2,000 shades

Finish



High Sheen

Safe for Health



VOC <50 gm/Lt
No added Lead, Arsenic, Chromium (VI) and Mercury

Coverage

70 -75 sq.ft/ lt/2 coats, under ideal test conditions.

(Coverage may depend on factors like surface conditions, surface preparation, application skill, weather conditions, dilution etc.)

Recommended Undercoats

Primer: For wall/plastered surfaces – Use Seal o Prime or Waterproofing primer coat : Damp Stop Duo or Damp Stop Elasto or PU RoofKoat

Putty: For wall/plastered surfaces – Bison Wall Putty or HS Waterproof Putty

Drying Time



SD: 30 min depending on weather conditions

HD: 4-6 hours


Dilution Ratio



Brush/Roller: 400 ml of water per 1L of emulsion. In case of N Base shades, no dilution is advised to ensure proper colour depth

For dark shades only: Maximum dilution should be 10% depending on shade.

Application Method

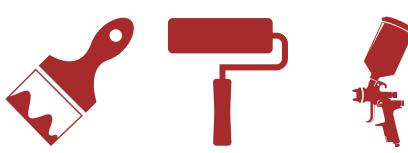

Brush/ Roller/ Spray

Gloss Level



18-22 at 60° GH when released



Packs



ColorBank/ Non-ColorBank – Pack



Fire Hazard Class

Non- flammable

Unusual Fire & Explosion Hazards

Material can splatter above 212°F.
Polymer film can burn.



Pot Life of Thinned Material

Within 24 hrs.

Health & Safety

If the paint comes in contact with eyes or skin, flush with a large amount of water for at least 15 minutes. See a physician, if irritation persists. Wash affected skin areas with soap and water.

WEATHERCOAT LONG LIFE 15



Surface Preparation

For Previously Painted Surfaces:



Strip all the old paint and remove all the loose dust, grease, fungus and algae by sanding or wire brushing.



Cracks, holes, dents and damp areas should be repaired properly before painting.



Treat the surface with Bio-wash solution and wash it next day with potable water. Leave the surface to dry thoroughly.

For fresh/new surfaces:

The surface should be allowed to cure properly.

Primer Coat Application: Apply 1-2 coats of Recommended Primer as per product usage guideline. For best results use Waterproofing Primer.

Top Coat Application

Dilute the paint as per the recommended dilution ratio. Apply 2 - 3 coats of topcoat paint with 4 – 6 hours of interval after each coat.

Special Note

Before painting, the following things should be checked thoroughly:

- ▶ Ideal moisture content of the wall should be below 12%
- ▶ Ideal pH value of the wall surface should be between 7-11

Points to Note

- ▶ Shake well before use and do not over dilute or over extend brush
- ▶ Stir and strain the material through a fine sieve before use
- ▶ Do not apply on high alkaline surface
- ▶ Do not apply paint on a wet surface
- ▶ Do not apply paint on chalking or flaking surface or where the surface is infected with fungus / algae
- ▶ Do not apply paint if the ambient temperature is less than or expected to fall below 10°C
- ▶ Keep out of reach of children and away from foodstuff
- ▶ In case of contact with eyes, wash immediately with water and seek medical help

Version No: BPP1/01/2026. Please note that this data sheet supersedes all previous versions.

BERGER PAINTS INDIA LIMITED

Berger House, 129 Park Street, Kolkata 700 017 | **CONSUMER RELATIONS MANAGER** Ph: 1800-103-6030
Fax: 91-33-2249-9729/9009 | SMS BERGER to 56767 | Email: consumerfeedback@bergerindia.com | www.bergerpaints.com